



SUPPLIERS TO THE KITCHEN, FURNITURE & RETAIL INDUSTRIES


**PRODUCT
BROCHURE**

EDITION 1



SUPPLIERS TO THE KITCHEN, FURNITURE & RETAIL INDUSTRIES

PROLINE RANGE

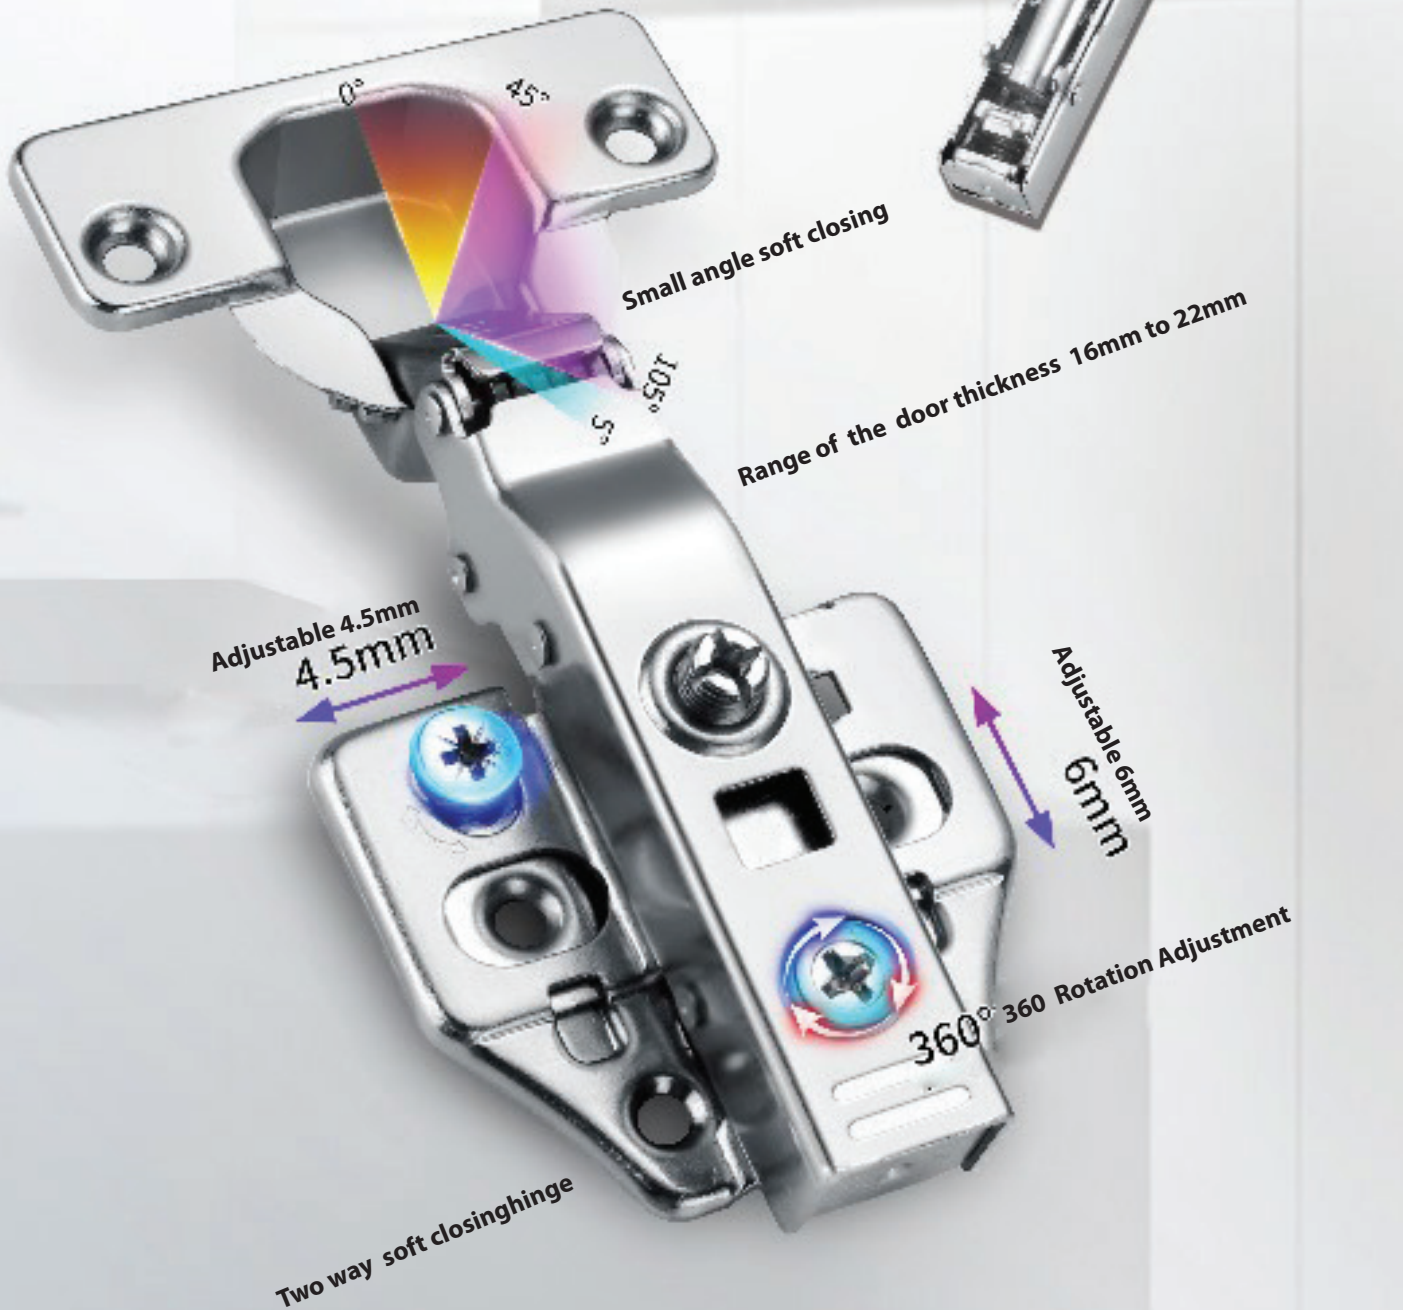



PROLINE HINGE

PL-301A

Premium Hinge offering Proline PL301A 110o Full Overlay Hinge with Integrated Silent System mechanism and 3D Adjustment is made from Steel and is Nickle Plated to provide a higher level of corrosion resistance and offers 3D adjustment with and Overlay and Depth adjustment of +3mm to -2mm. The design aesthetics of the hinge gives it a modern look and quality finish made for the discerning buyer who does not compromise on quality. Tested to 50 000+ opening and closing cycles which ensures durability and reliable performance over time and supplied in a combination of Hinge Dowel and Euro Screw Mounting Plate or standard Screw-fix installation. The test cycle indicates the hinge's ability to withstand repeated use without significant wear and tear.

110o opening angle

45mm Drilling Pattern

35mm Cup Diameter

11.5mm Cup Depth

Door Thickness of 16mm - 22mm

Overlay and Depth adjustment of +3mm to -2mm

Full Overlay

Closing angle of 45o with seamless Soft Closing Integrated Silent System mechanism Fast Assembly with Quick-Lock Mounting Plate Steel Nickle Plated



PROLINE HINGE

PL-1653A

Proline PL1653A 165o Full Overlay hinge with Integrated Silent System mechanism and 3D adjustment is made from Steel and is Nickle Plated to provide a higher level of corrosion resistance and offers 3D adjustment with and Overlay and Depth adjustment of +3mm to -2mm.

The design aesthetics of the hinge gives it a modern look and quality finish made for the discerning buyer who does not compromise on quality.

Tested to 50 000 opening and closing cycles which ensures durability and reliable performance over time and supplied in a combination of Hinge Dowel and Euro Screw Mounting Plate or standard Screw-fix installation.

The test cycle indicates the hinge's ability to withstand repeated use without significant wear and tear.

105o opening angle

45mm Drilling Pattern

35mm Cup Diameter

11.5mm Cup Depth

Overlay and Depth adjustment of + 2mm to -1mm

Clip-on application

Fast Assembly with Quick-Lock Mounting Plate

Steel Nickle Plated



PROLINE STANDARD HINGE OFFERING

PL-305A

The PL305A 105o Full Overlay Black hinge with Integrated Soft Close Mechanism and Clip-on Mounting plate offers the versatility of choosing a Black hinge for specific colour variations.

The cost-efficient hinge offers the practical convenience for everyday use enhanced by the smooth silent system operation of the Integrated soft-close mechanism.

Tested to 40 000 opening and closing cycles and supplied in standard screw-fix installation.

The construction, durability and underlying features of the hinge makes it the best value for money hinge available.

105o opening angle

45mm Drilling Pattern

35mm Cup Diameter

11.5mm Cup Depth

Overlay and Depth adjustment of + 2mm to -1mm

Closing angle of 35o with seamless Soft Closing Integrated Silent System mechanism

Fast Assembly with Quick-Lock Mounting Plate

Steel Black Plated



PROLINE 312A HINGE

PL-312A

The PL312A 105o Full Overlay hinge and Clip-on Mounting Plate is our budget friendly hinge which will appeal to those buyers on a limited budget. The standard clip-on hinge is made from steel and is Nickel plated offering a solid construction in a budget friendly hinge making it the ideal choice for everyday use and for residential developments Tested to 40 000 opening and closing cycles which ensures durability and reliable performance over time, which makes it a quality offering in the budget friendly segment.

105o opening angle

45mm Drilling Pattern

35mm Cup Diameter

11.5mm Cup Depth

Overlay and Depth adjustment of + 2mm to -1mm

Clip-on application

Fast Assembly with Quick-Lock Mounting Plate

Steel Nickel Plated

IMPORTANT INFORMATION

THE OPENING AND CLOSING TEST CYCLES INDICATES THE HINGE'S ABILITY TO WITHSTAND REPEATED USE WITHOUT SIGNIFICANT WEAR AND TEAR.

TAKE NOTE:

ALL OUR HINGES, WHILE OFFERING A HIGH LEVEL OF CORROSION RESISTANCE SUCH AS THE PROLINE RANGE, DO NOT OFFER ANY GUARANTEE AGAINST RUST NEITHER EXPRESSED OR IMPLIED.



PROLINE DRAWER SYSTEMS

L-BOX

Introducing our Proline Range of Single Wall and Double Wall Drawer Systems

L-Box single wall drawer system powder coated in Graphite Black offers exceptional build quality with a modern sleek slimline design profile and superior 40kg load bearing capacity. The L-Box combines functionality and durability with integrated vertical, lateral and tilt adjustment. Offered in a standard drawer height of 116mm and a pot drawer height of 199mm and is supplied with a Synchronised Soft-Close Full Extension Undermount slide manufactured from galvanised steel which has a load bearing capacity of 40kg's. Offered in 400mm and 500mm lengths, the drawer slide offers exceptional stability. The full extension feature enables the full length of the drawer box to completely pull out when opened allowing easy access to items at the rear end of the drawer box. The standard 40kg runner offers exceptional load bearing capacity which is more than sufficient for most applications and glides smoothly and effortlessly when opened and closed.

The integrated soft-closing action ensures that your drawer unit never slams shut when closed.

1 x L Box H116 Graphite Black Set includes (in 400mm or 500mm Length)

- 1 x Drawer Side Profile H116 (left and right)
- 2 x Drawer Front Connectors screw on
- 2 x Back Panel Connectors & 4 screws
- 1 x 40kg Synchronised soft-close runner set (left and right)
- Installation instructions
- Supply scope: 1 set per box / 6 sets per carton



1 x L Box H199 Graphite Black Set includes (in 400mm or 500mm Length)

- 1 x Drawer Side Profile H199 (left and right)
- 2 x Drawer Front Connectors screw on
- 2 x Back Panel Connectors & 4 screws
- 1 x 40kg Synchronised soft-close runner set (left and right)
- Installation instructions
- Supply scope: 1 set per box / 5 sets per carton





PROLINE DRAWER SYSTEMS

R-BOX

R-Box double walled drawer system powder coated in Grey offers exceptional build quality with a modern design and superior 40kg load bearing capacity. The R-Box combines functionality and durability with side, height and tilt adjustment with toolless assembly and removal of drawer fronts. Offered in a standard drawer height of 84mm and a pot drawer height of 167mm with gallery rail.

The R-Box is supplied with a Synchronised Soft-Close Full Extension Under-mount slide manufactured from galvanised steel which has a load bearing capacity of 40kg's.

Offered in 400mm and 500mm lengths, the drawer slide offers exceptional stability.

The full extension feature enables the full length of the drawer box to completely pull out when opened allowing easy access to items at the rear end of the drawer box.

The standard 40kg runner offers superior load bearing capacity and is more than sufficient for most applications and glides smoothly and effortlessly when opened and closed.

The integrated soft-closing action ensures that your drawer unit never slams shut when closed.

1 x R Box H84 Grey Set includes (in 400mm or 500mm Length)

- 1 x Drawer Side Profile H84 (left and right)
- 2 x Drawer Front Connectors screw on
- 2 x Cover Caps
- 2 x Rear Panel Connectors
- 1 x 40kg Synchronised soft-close runner set (left and right)
- Installation instructions
- Supply scope: 1 set per box / 6 sets per carton



1 x R Box H167 Grey Set includes (in 400mm or 500mm Length)

- 1 x Drawer Side Profile H84 (left and right)
- 1 x Gallery Pot Rail set rectangular (left and right)
- 2 x Gallery rail connectors
- 2 x Drawer Front Connectors screw on
- 2 x Cover Caps
- 2 x Rear Panel Connectors
- 1 x 40kg Synchronised soft-close runner set (left and right)
- Installation instructions
- Supply scope: 1 set per box / 6 sets per carton





PROLINE UNDERMOUNT DRAWER SLIDES FOR WOODEN DRAWS

PL-B3SJ

Introducing the premium Proline PL-B3SJ Synchronised Soft-Close Full Extension Undermount Runner for Wooden Drawers.

Load Bearing Capacity of 35kg's makes the PL-B3SJ a class leading contender in the concealed runner segment

Manufactured from galvanised steel, the PL-B3SJ offers a silky-smooth opening and closing action with enhanced stability and features 3D adjustment for height, side and tilt adjustment.

The high-quality runner is suitable for drawers with a side profile of 16mm.

The Proline B3SJ runner is offered in the following sizes

350mm, 400mm, 450mm and 500mm supplied with 3D Catches

1 x PL-B3SJ Set Includes

1 x Proline B3SJ 3D Soft-Close runner left

1 x Proline B3SJ 3D Soft-Close runner right

1 x Proline 3D Catch left

1 x Proline 3D Catch right

Installation instructions

Supply scope: 10 sets per carton



PROLINE BALL BEARING SLIDES FOR WOODEN DRAWS

PL-461G

Introducing the premium Proline PL-461G Soft-Close Ball Bearing runner with dual soft-close mechanism ensuring your draws always close silently and efficiently every time.

Load bearing capacity of 35kg's further enhances the quality and durability of the runner.

Zinc plated with a side profile width of 45mm and a material thickness of 1.2/1.2/1.5mm makes the PL-461G the premium ball bearing slide available.

Cost effective and easy to install, the PL-461G runner should be your first choice every time.

The proline 461G ball bearing runner is offered in the following sizes

450mm and 500mm

1 x PL-461G Set includes

1 x Proline 461G Soft-Close ball bearing slide left

1 x Proline 461G Soft-Close ball bearing slide right

Installation instructions

Supply scope: 15 sets per carton



PROLINE CORNER UNIT

PL-BK4011

Introducing the Proline PL-BK4011 Corner unit in powder coated Grey which offers the convenience of easy access by effortlessly allowing the 2 trays to fully swing out of the corner cupboard.

The integrated dual soft-opening and soft-closing mechanism allows the tray to open and close smoothly and silently which is a unique feature of the PL-BK4001 corner unit.

For installation in 900mm blind corner cupboard with 450mm door width.

The swing out trays allows for easy access to contents by swinging out in front of the cabinet.

20kg load bearing capacity = 10kg's per tray x 2

Swing-out trays with anti-slip matt

Supplied in left-hand configuration and right-hand configuration.

Unit can also be retrofitted

1 x PL-KB4011 Corner set includes

2 x Swing out trays

2 x Swivel arm sets

Installation instructions



PROLINE BASE UNITS AND ACCESSORIES

PL-BK6406

Introducing the Proline PL-BK6406 Base 300 unit manufactured from Aluminium Alloy and powder coated Grey with Tempered Glass sides.

Suitable for 300mm cupboard, the PL-BK6406 has a sleek modern design enhanced with tempered glass sides on the shelf trays which makes it a perfect choice for modern kitchens.

Soft-closing runner for smooth and silent closing action

Space saving design utilises the full width of the cabinet

Full-extension runner offers easy access to stored contents.

Set includes: 1 x complete unit with installation instruction

Supply scope: 1 unit per carton





PROLINE WASTE STORAGE BIN

PL-WB0240E

Introducing the Proline PL-WB0240E waste bin for 450mm cabinet with soft-close, over-extension runner which allows the complete waste unit to extend out of the cupboard when opened.

Supplied with 2 x 30 litre grey inset waste bins for a combined capacity of 60 litres making the PL-WB0240E bin the ideal waste storage solution for your kitchen.

Bins are manufactured from ABS Plastic and Frame is steel powder coated grey. Side wall mounted and supplied with 1 big shelf cover and 2 small covers for individual bins.

1 x PL-WB0240E waste bin set includes

- 2 x 30ltr bins
- 1 x Runner set (left and right)
- 1 x Frame set
- 1x Mounting kit
- 1 x Shelf lid
- 2 x Small lids
- Installation instructions
- Supply scope: 1 unit per carton





PROLINE RANGE



Disclaimer

Whilst SHD has used its best endeavours to ensure that the information contained in this catalogue – including (but not limited to) technical specifications, measurements and colours – are accurate and up to date at the time of issue, does not warrant that it is correct or complete. We reserve the right to make corrections and changes without notification and unless otherwise stated and agreed upon in writing, SHD makes no warranties of any kind, express or implied, that goods sold are suitable for any particular purpose or application under any specific condition.

www.shdgroup.co.za

☎ 060 589 9523

☎ 083 356 9313